



## Modeling contaminant transport in limestone aquifers

**Mosthaf, Klaus; Fjordbøge, Annika Sidelmann; Døssing Overheu, Niels; Broholm, Mette Martina; Bjerg, Poul Løgstrup; Binning, Philip John**

*Published in:*  
ATV - Jord og Grundvand 2016

*Publication date:*  
2016

*Document Version*  
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

*Citation (APA):*  
Mosthaf, K., Fjordbøge, A. S., Døssing Overheu, N., Broholm, M. M., Bjerg, P. L., & Binning, P. J. (2016). Modeling contaminant transport in limestone aquifers. In *ATV - Jord og Grundvand 2016: Abstractsamling* (pp. 17-18). ATV Jord og Grundvand.

---

### General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

## MODELING CONTAMINANT TRANSPORT IN LIMESTONE AQUIFERS

Post Doc. Klaus Mosthaf<sup>1</sup>, Forsker Annika S. Fjorbøge<sup>1</sup>,  
Specialkonsulent Niels Døssing Overheu<sup>2</sup>, Lektor Mette M. Broholm<sup>1</sup>,  
Professor Poul L. Bjerg<sup>1</sup>, Professor Philip J. Binning<sup>1\*</sup>

<sup>1</sup>DTU Miljø, <sup>2</sup>Region Hovedstaden

\* pjb@env.dtu.dk

Limestone aquifers are a major drinking water resource in Denmark. Many of them are threatened by contaminants like chlorinated solvents. Understanding the fate and transport of these contaminants is crucial to evaluate the risk to drinking water supply and to plan remedial actions. Limestone aquifers are often heavily fractured and contain chert layers and nodules. This leads to a preferential flow and transport of contaminants in highly conductive zones of the aquifer and to an exchange with the low-conductive limestone matrix, making the understanding and prediction of the contaminant propagation a challenge. Several approaches have been developed to model contaminant transport in fractured media, such as discrete fracture, equivalent porous media, and dual continuum models. However, these modeling concepts are not well tested for plume migration in real limestone geologies. Our goal was therefore to develop, evaluate and compare approaches for modeling transport of contaminants in fractured limestone aquifers and to obtain the required model parameters from field tests.

The model comparison was conducted for a contaminated site at Akacievej, Hedehusene, where a plume of dissolved PCE has migrated through a fractured limestone aquifer. Field data at the site includes information on spill history, distribution of the contaminant (multilevel sampling), geology and hydrogeology. To describe the geology and fracture system, data from borehole logs and cores was combined with flow logs and pump test data. A conceptual model was constructed for the site and used as the basis for numerical models. The models were used to evaluate a pump and treat remediation system, which has been running at the site for 8 years, and to evaluate the speed at which the contaminant plume is migrating downstream of the site.

Simulation results show considerable differences between modeling approaches depending on the aquifer properties, and that it is important to carefully select the modeling approach to suit the model purpose. A combined pump and tracer test is scheduled for spring 2016, which will allow for a calibration of the models and improve the conceptual understanding of the interplay of fractures and limestone matrix. It will provide further guidance for the discrimination between the different models for the application to contaminant transport in fractured limestone aquifers.

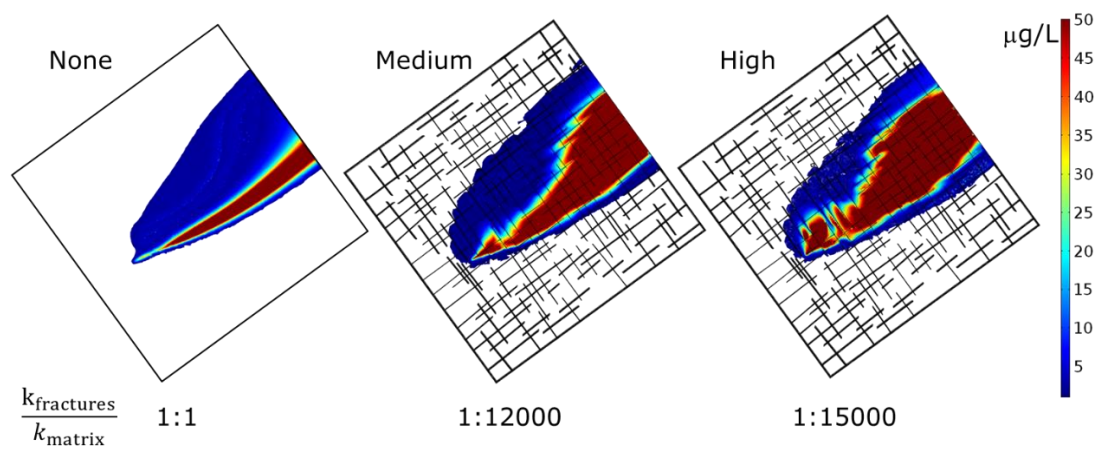


Figure 1: Plume migration simulated with no fractures, medium contrast between fracture conductivity and matrix conductivity, and a high contrast.

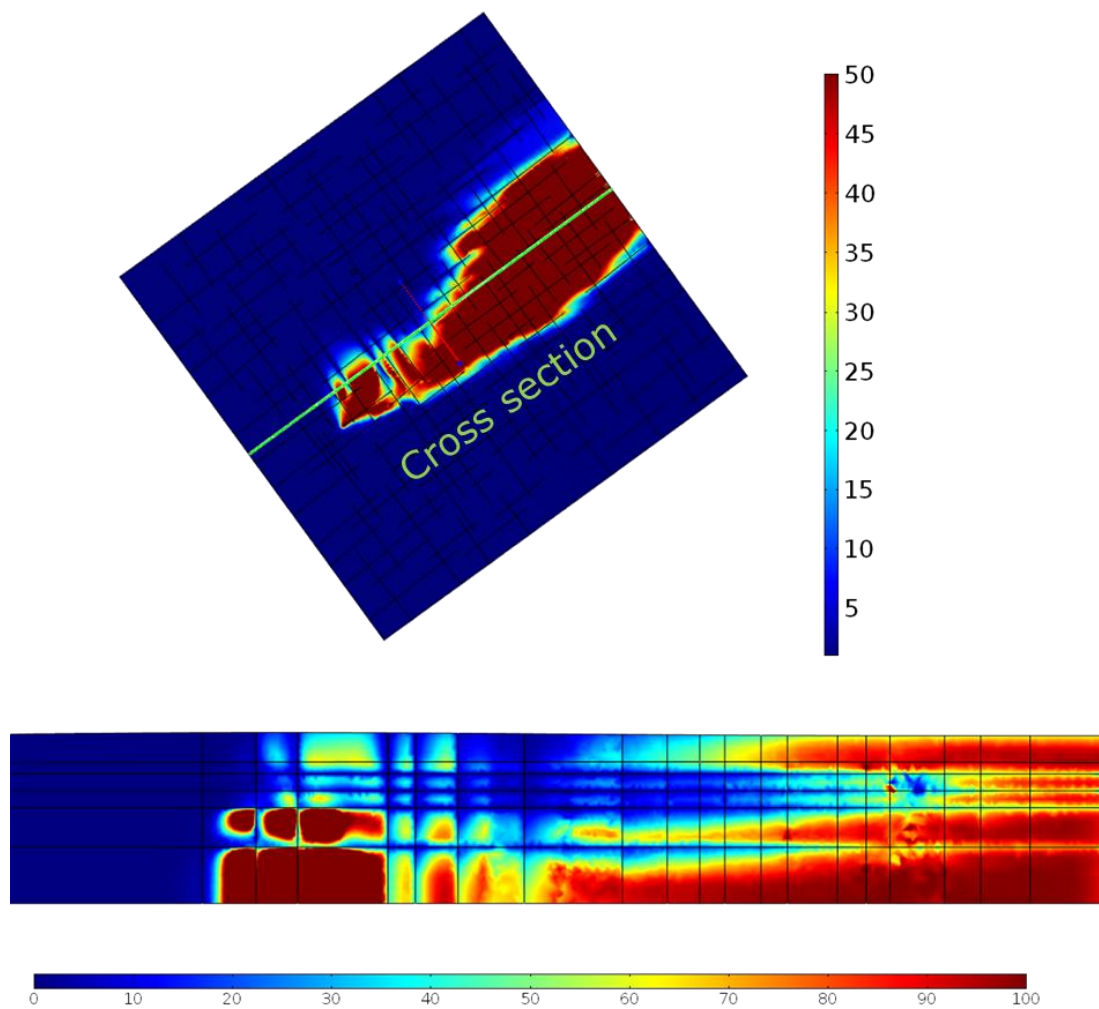


Figure 2: Simulated 3D effects in a horizontally and vertically fractured aquifer.